


## ASBS 2-M12-S


Micro (M12), Splitter, 2-way, with two Micro (M12) female connectors, IP 67 and NEMA 6P rated.




ASBS 2 M12-S2326

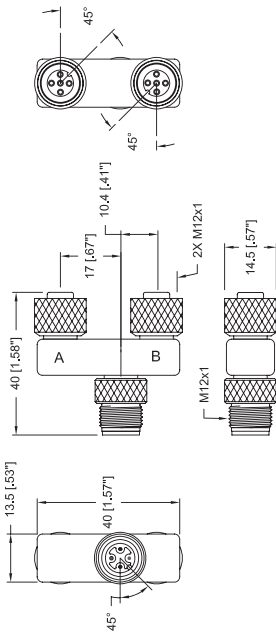


ASBS 2 M12-S3187

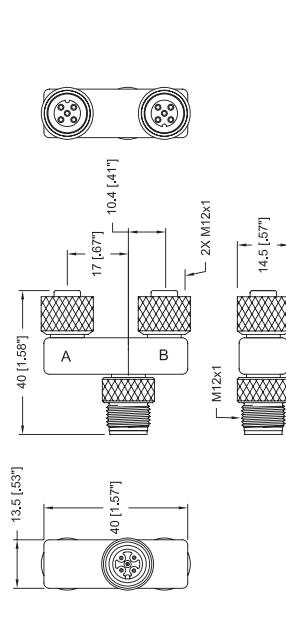

ASBS 2 M12-S2325

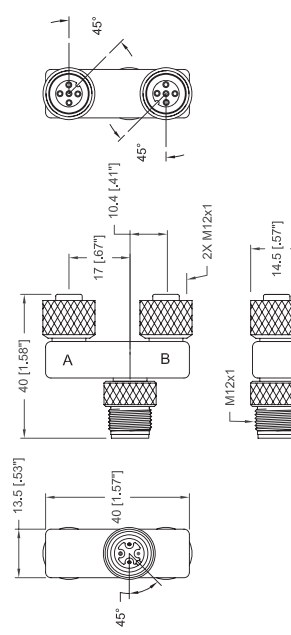


ASBS 2 M12-S3995

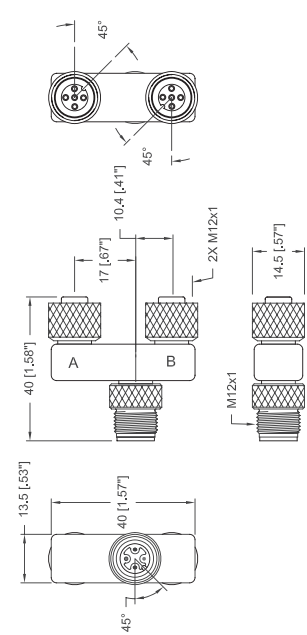


### Pin Assignment

#### ASBS 2 M12-S




### Wiring Diagram


#### ASBS 2 M12-S2326




#### ASBS 2 M12-S3187



#### ASBS 2 M12-S2325



#### ASBS 2 M12-S3995



**Technical Data**

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -15°C (+5°F) / +90°C (+194°F)

**Mechanical**

Molded body PUR, black  
 Insert PUR, black  
 Contact Brass, gold over nickel plated  
 Coupling nut Brass, nickel-plated  
 O-ring FKM

**Electrical**

Contact resistance ≤5mΩ  
 Voltage rating 250 V  
 Current rating 4 A

Mini

Micro (M12)

Micro (1/2"-20)

Pico (M8)

Din Valve  
Connectors

Part Number	Poles	
ASBS 2 M12-S2326	4	
ASBS 2 M12-S3187	5	
ASBS 2 M12-S2325		
ASBS 2 M12-S3995		

References