

7/8"-Splitters/T-Connectors / Power Tap


0906 UTP 315



7/8" Male to Female (2-pole) Feed Through with 2-pole Drop

Splitter/T-connector, with one 7/8" male to female (2-pole) feed through with 7/8" female drop, 2-poles.


0906 UTP 315

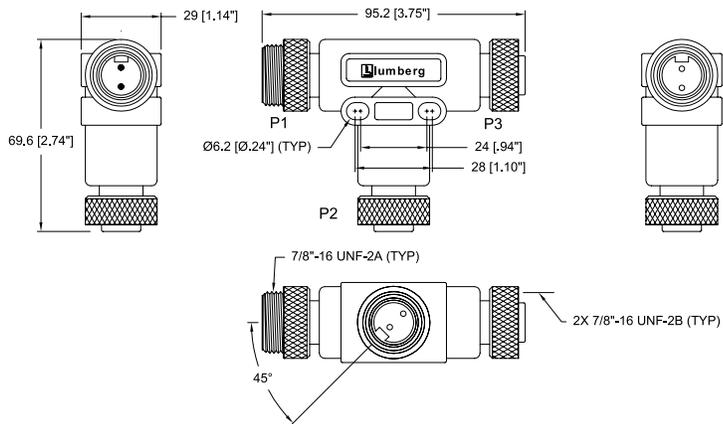

Pin Assignments


Face Views

7/8 - 2 poles



1 = white
2 = black

Wiring Diagram





7/8"-Splitters/T-Connectors / Power Tap 0906 UTP 315

Technical Data

Environmental

Degree of protection IP 68 / NEMA 6P
Operating temperature range -40°C (-40°F) / +90°C (+194°F)

Mechanical

Housing / Molded body PUR, yellow
Coupling nut Aluminum, black anodized
Contact Solid-machined brass, gold over silver plating
Insert PUR

Electrical

Nominal current 12 A
Nominal voltage 600 V

Part Number	Pins	Characteristics
0906 UTP 315	2	