

M12-Receptacle Connectors In Accordance With IEC 61076-2-101


RSFM | PRSFM



Male, 3-, 4- and 5-Pole

Receptacle connector, combined FIXCON/M12 male connector for front mounting, solder connections, chassis side thread M16 x 1.5 (panel nut RSKFM 16).

RSFM

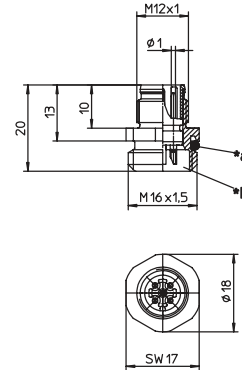

*a O-ring enclosed separately

*b Attention!
To ensure mechanical stability and impermeability, the wire connections must be epoxy potted after cable assembly.




Male, 3-, 4- and 5-Pole

Receptacle connector, M12 male connector for front mounting, housing of stainless steel, solder connections, solder contacts not potted, chassis side thread M16 x 1.5 (panel nut RSKFM 16)

– especially designed for use in food processing equipment –.

PRSFM

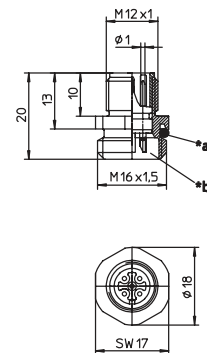

*a O-ring enclosed separately

*b Attention!
To ensure mechanical stability and impermeability, the wire connections must be epoxy potted after cable assembly.

Pin Assignments

Face Views / M12

3 poles



4 poles



5 poles





Be Certain with Belden

M12-Receptacle Connectors In Accordance With IEC 61076-2-101

RSFM | PRSFM

Technical Data

Environmental









Degree of protection	IP 67 / NEMA 6P
Operating temperature range	RSFM: -25°C (-13°F) / +80°C (+176°F) PRSFM: -25°C (-13°F) / +70°C (+158°F)

Mechanical

Housing / Molded body	RSFM: CuZn, nickel-plated PRSFM: stainless steel
Insert	RSFM: PA PRSFM: PBT
Contact	CuZn, pre-nickel and 0.8 microns gold-plated
O-ring	RSFM: FKM PRSFM: EPDM

Electrical

Contact resistance	≤ 5 mΩ
Nominal current at 40°C	4 A
Nominal voltage	3–4 poles 240 V 5 poles 60 V Connection area must be epoxy potted.
Rated voltage	3–4 poles 250 V 5 poles 63 V
Test voltage	3–4 poles 2.0 kV eff. / 60 s 5–8 poles 1.5 kV eff. / 60 s
Insulation resistance	> 10 ⁹ Ω
Pollution degree	3

Part Number	Pins	Characteristics
RSFM 3	3	 
RSFM 4	4	 
PRSFM 4		 
RSFM 5	5	 
PRSFM 5		