

D-Size 1 3/8" Mini Power to A-Size 7/8" Mini Reducer, 3- and 4-Pole
RSP-RKPA


RSP-RKPA



3- and 4-Pole

1 3/8" Mini Power to 7/8" Mini Reducer, 3- and 4-Pole


RSP-RKPA

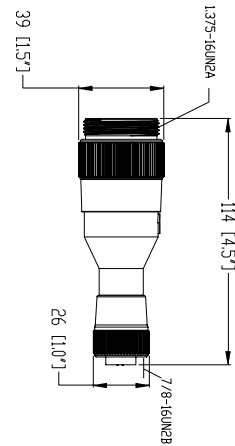


Pin Assignments

Face Views

3 pole
Male 1-3/8



Female 7/8



4 pole
Male 1-3/8



Female 7/8



Be Certain with Belden

D-Size 1 3/8" Mini Power to A-Size 7/8" Mini Reducer, 3- and 4-Pole RSP-RKPA

Technical Data

Environmental

Degree of protection NEMA 6P-IP68, IP67
Operating temperature range -30°C (-86°F) / +90°C (194°F)

Mechanical

Housing / Molded body PVC / Black
Contact carrier PVC / Black
Contacts CuSn alloy / gold over ni plated
Coupling nut CuZn / Ni protection class
Conductor insulation: PVC / nylon

Electrical

Voltage rating 600 V

Part Number	Pins	Current Rating	Characteristics
RSP 3-RKPA 3	3	18A	
RSP 4-RKPA 4	4	15A	