

D-Size 1 3/8" Mini Power to A-Size 7/8" Mini, 3- and 4-Pole, TC-ER Rated Cable, Male-Female, Reducing Cordset

RSP-RKPA | RSP-RKWPA


RSP-RKPA | RSP-RKWPA



3- and 4-Pole

1 3/8" Mini Power to 7/8" Mini, 3- and 4-Pole, 14AWG TC-ER Rated Cable, Male-Female, Reducing Cordset


RSP-RKPA

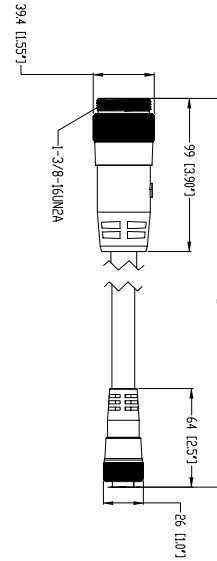

1 3/8" Power Mini to 7/8" Mini, 3-Pole, 14 AWG TC-ER Rated Cable, Male-Female 90°, Reducing Cordset



RSP-RKWPA

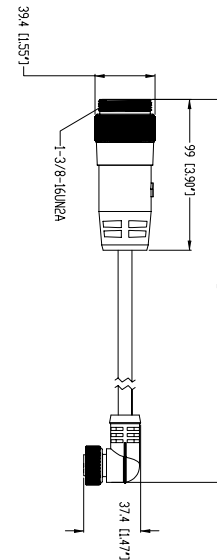


Pin Assignments


Face Views

3 pole

Male 1-3/8



Female 7/8




4 pole

Male 1-3/8



Female 7/8



1- Black
2- Green/Yellow
3- White

1- Black
2- Green/Yellow
3- Red
4- White

1- Black
2- Green/Yellow
3- Red
4- White

Be Certain with Belden

D-Size 1 3/8" Mini Power to A-Size 7/8" Mini, 3- and 4-Pole, TC-ER Rated Cable, Male-Female, Reducing Cordset

RSP-RKPA | RSP-RKWPA

Technical Data

Environmental

Degree of protection NEMA 6P-IP68, IP67
 Operating temperature range -30°C (-86°F) / +90°C (194°F)

Mechanical







Housing / Molded body PVC / Black
 Contact carrier PVC / Black
 Contacts CuSn alloy / gold over Ni plated
 Coupling nut CuZn / Ni
 Conductor insulation: PVC / nylon

Electrical

Voltage rating 600 V

Cable Specifications

Cable No.	Conductors	Outer Jacket	Gauge	Jacket Color	OD
802	3	TPE	14AWG	Black	.359" (9.1 mm)
805	4	TPE	14AWG	Black	.390" (9.9 mm)

Part Number	Pins	Gauge	Current Rating	Standard Cable Lengths	Characteristics
RSP 3-RKPA 3-802/...M	3	14	18A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	UL  
RSP 4-RKPA 4-805/...M	4	14	15A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	UL  
RSP 3-RKWPA 3-802/...M	3	14	18A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	UL  
RSP 4-RKWPA 4-805/...M	4	14	15A	0.5M / 1M / 1.5M / 2M / 2.5M / 3M / 4M / 5M / 6M / 8M / 10M / 12M / 14M / 15M / 18M / 20M / 22M / 25M / 30M / 35M / 40M / 45M / 50M	UL 