

**1/2"-20-Round-Plug Connector, Double-Ended Cordsets, US Color Code**



RST...U-RKT ...U | RST...U-RKWT...U



**3-Poles**


1/2"-20 actuator/sensor-cordsets, double ended, 3-poles, male to female straight connector, dual keyway, 18 gauge, US color code.

RST...U-RKT...U

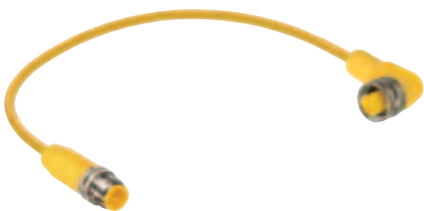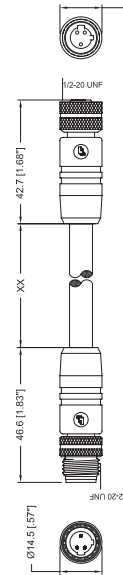

1/2"-20 actuator/sensor-cordsets, single ended, 3-poles, male to female 90° connector, dual keyway, 18 gauge, US color code.


RST...U-RKWT...U

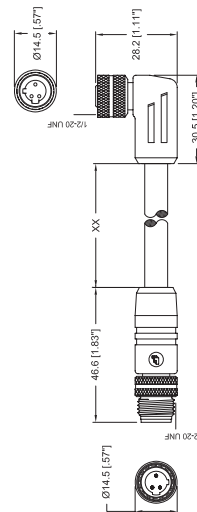

**Pin Assignments**

1/2"-20 - Male / Female

3 poles



1 = green  
2 = black  
3 = white



Be Certain with Belden

**1/2"-20-Round-Plug Connector, Double-Ended Cordsets, US Color Code**

RST...U-RKT...U | RST...U-RKWT...U

**Technical Data**

**Environmental**

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -40°C (-40°F) / +90°C (+194°F)

**Mechanical**

Housing / Molded body TPU, yellow  
 Insert TPU, yellow  
 Contact CuZn, gold over nickel plated  
 Coupling nut CuZn, nickel-plated

**Electrical**

Current rating 4 A  
 Voltage rating 250 V

**Cable Specifications - US Color Code**

Cable No.	Outer Jacket	Gauge	Conductor Size	Jacket Color	OD
<b>619</b>	<b>CPE</b>	18AWG	3 x 0.75mm <sup>2</sup>	Yellow	.370" (9.4 mm)

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3U-RKT 3U-619/...F    RST 3U-RKWT 3U-619/...F	<b>3</b>	<b>CPE</b>	3 F / 6 F / 12 F / 15 F	

