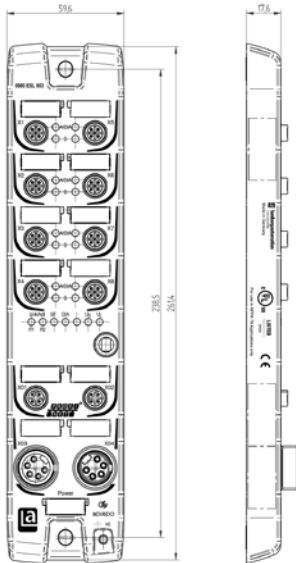





LioN-R PROFINET I/O Rugged Modules with 16 Digital Outputs



Type	0980 ESL 802-PNET 16DO-M12-R	
Product Description	LioN-R Digital output module, 16 digital output channels with galvanic isolation, PROFINET device, M12 LAN port, 4 poles D-coded, 7/8" power supply 5 poles	
Order Number	934 692-002	
Diagnostic indication		
LED	Indication	Condition
Us	Green	Logic/sensor power supply
U _L	Green	Actuator power supply
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	Yellow	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow flashing Off	Connection to an PROFINET device IO device exchanging data No connection to any other device
P2 Lnk/Act	Green Yellow flashing Off	Connection to an PROFINET device IO device exchanging data No connection to any other device
BF	Red Off	Bus error, no data exchange with I/O controller via PROFINET No error message
DIA	Red Red flashing Off	Common indicator for periphery errors Firmware update No error message

Technical modifications reserved.

Bit assignment								
Bit	7	6	5	4	3	2	1	0
M12 Input 16DO								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

Pin assignment		
LAN connection M12, D-coded  <ul style="list-style-type: none"> 1 = TD+ 2 = RD+ 3 = TD- 4 = RD Housing = shielding	Power supply 7/8"  <ul style="list-style-type: none"> 1 = GND (0 V) 2 = GND (0 V) 3 = PE/Earth 4 = 24 V 5 = 24 V 	Input/Output M12  <ul style="list-style-type: none"> 1 = +24 V 2 = IN B 3 = GND (0 V) 4 = IN A 5 = earth Housing = PE

Part number	Order number
0980 ESL 802-PNET 16DO-M12-R	934 692-002





LioN-R PROFINET I/O Rugged Modules with 16 Digital Outputs

Product Description	
Type	0980 ESL 802-PNET 16DO-M12-R
Technical Data	
Protection Class	IP67
Operating Temperature Range	-10°C to +60°C
Weight	605 g
Housing Material	Metal (diecast zinc)
Bus System	
Transmission Rate	10/100 Mbs
Address Range	0 to 255
Default Address	0
Actuator Power Supply UL	
Rated Output Current	24 V DC
Voltage Range	19 to 30 V DC
Reverse Polarity Protection	Yes/antiparallel diode
Indicator	LED green
Outputs	
Rated Output Current	1.6 A per channel
Short Circuit-proof	Yes
Max. Current Carrying Capacity	9 A per module
Overload-proof	Yes
Number of Digital Channels	16
Channel Type N.O.	p-switching
Status Indicator	LED white per channel
Diagnostic Indicator	LED red per port
Galvanic Isolation from Electronics	Yes
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	10 pieces

The use of these products in aggressive media should be verified in each case. Technical modifications reserved. Certifications have been applied for UL and CSA.