

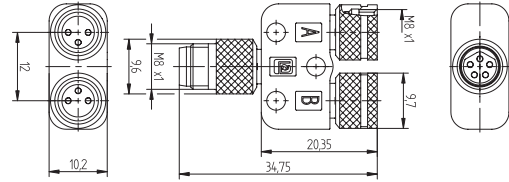



M8 T-Splitter

Product Description	
Order Designation	ASBS 2 M8
	
Description	T-splitter, M8 5 pin male (outlet) and two M8 3 pin female (inlets) connectors, with knurled nuts and vibration proof connections
RoHS-compliant (2011/65/EU)	Yes
(Construction Type) Standard	IEC 61076-2-104
Technical Data	
Ambient Temperature	-40°C to +90 °C
Housing Material/Body	TPU
Contact Holder Material	TPU/PA
Contact Material/Surface Finish	CuZn/Au
Screw Coupling Material	CuZn, nickel-plated
Mechanical Data	
Degree of Protection	IP67 (only when mated with Hirschmann/Lumberg counterparts)
Electrical Data	
Contact Resistance	≤ 5 mΩ
Rated Voltage	30 V
Rated Current	3 A
Pollution Degree	3
Technical Drawing ASBSM 2 M8 503	
Pin Assignment	<p>A / B</p> 
Technical Drawing	
Circuit Diagram	

Order Information

Order No.	Order Designation	No. of Pins	Characteristics
934-863-001	ASBSM 2 M8 5-3	3 (inlets)5 (outlet)	  