

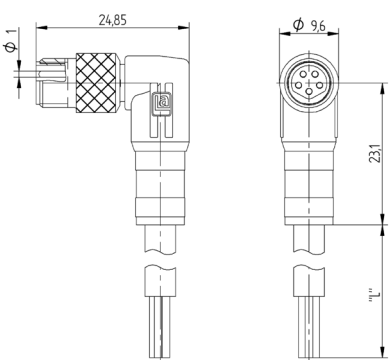












M8 5-Pole, B-coding Single-Ended Overmolded Cordsets, Right-Angle Male with Screw Coupling for Actuators and Sensors

Product Description	
Type	RSMWV 5
	<div style="display: flex; align-items: center;"> <div style="background-color: red; color: white; padding: 2px 5px; font-weight: bold; margin-right: 5px;">NEW!</div>  </div>
Description	Actuator/sensor single ended cordset, M8 male connector, angeled, with screw coupling and overmolded cable, 5-pin, B-coding
RoHS (2011/65/EU)	Yes
(Construction Type) Standard	IEC 61076-2-104
Approvals	UL
Technical Data	
Ambient Temperature	-40 to +90°C, mind cable temperature range
Housing Material/Grip	TPU
Contact Holder Material	PA
Contact Material/Surface Finish	CuZn, gold-plated
Screw Coupling Material	CuZn, nickel-plated
Mechanical Data	
Degree of Protection	IP65, IP67, IP69K (only when mated with Hirschmann/Lumberg counterparts / IP69K only with PUR STL)
Electrical Data	
Contact Resistance	≤ 10 mΩ
Rated Voltage	50 VAC / 60 VDC; UL: 30 V AC/DC
Rated Current	3 A (0.25 mm ²)/4 A (0.34 mm ²)
Pollution Degree	3
Technical Drawing	
Pin Assignment	M8, male, 5-poles  <ul style="list-style-type: none"> 1 = brown 2 = white 3 = blue 4 = black 5 = gray
Technical Drawing	

Continued Next Page

M8 5-Pole, B-coding Single-Ended Overmolded Cordsets, Right-Angle Male with Screw Coupling for Actuators and Sensors (continued)
Order Information

Order No.	Order Designation	No. of Pins	Jacket	Conductor Size	Characteristics
934-844-001	RSMWV 5-671/2 M	5	PVC, black	0.34 mm ²	
934-844-002	RSMWV 5-671/5 M	5	PVC, black	0.34 mm ²	
934-844-003	RSMWV 5-671/10 M	5	PVC, black	0.34 mm ²	
934-844-004	RSMWV 5-671/15 M	5	PVC, black	0.34 mm ²	
934-844-005	RSMWV 5-671/20 M	5	PVC, black	0.34 mm ²	
934-844-006	RSMWV 5-671/25 M	5	PVC, black	0.34 mm ²	
934-844-007	RSMWV 5-293/2 M	5	PUR, Halogen free, black	0.34 mm ²	   
934-844-008	RSMWV 5-293/5 M	5	PUR, Halogen free, black	0.34 mm ²	
934-844-009	RSMWV 5-293/10 M	5	PUR, Halogen free, black	0.34 mm ²	
934-844-010	RSMWV 5-293/15 M	5	PUR, Halogen free, black	0.34 mm ²	
934-844-011	RSMWV 5-293/20 M	5	PUR, Halogen free, black	0.34 mm ²	
934-844-012	RSMWV 5-293/25 M	5	PUR, Halogen free, black	0.34 mm ²	
934-844-013	RSMWV 5-507/2 M	5	PVC, black	0.25 mm ²	
934-844-014	RSMWV 5-507/5 M	5	PVC, black	0.25 mm ²	
934-844-015	RSMWV 5-507/10 M	5	PVC, black	0.25 mm ²	
934-844-016	RSMWV 5-507/15 M	5	PVC, black	0.25 mm ²	
934-844-017	RSMWV 5-507/20 M	5	PVC, black	0.25 mm ²	
934-844-018	RSMWV 5-507/25 M	5	PVC, black	0.25 mm ²	
934-844-019	RSMWV 5-506/2 M	5	PUR, Halogen free, black	0.25 mm ²	   
934-844-020	RSMWV 5-506/5 M	5	PUR, Halogen free, black	0.25 mm ²	
934-844-021	RSMWV 5-506/10 M	5	PUR, Halogen free, black	0.25 mm ²	
934-844-022	RSMWV 5-506/15 M	5	PUR, Halogen free, black	0.25 mm ²	
934-844-023	RSMWV 5-506/20 M	5	PUR, Halogen free, black	0.25 mm ²	
934-844-024	RSMWV 5-506/25 M	5	PUR, Halogen free, black	0.25 mm ²	