

1 1/8" Mini-Receptacle Connectors, Front Mount, US Color Code

RSF 90M...120M | RKF 901M...1201M




Male, 9-, 10-, and 12-Pole

Receptacle connector, 1 1/8"-c body, male 9-, 10-, and 12-pole for front mounting, assembled stranded wire, potted with epoxy, chassis side thread 1/2" NPT, screw connection.

- US Color Code -

RSF 90M...120M

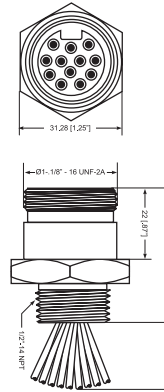


Female, 9-, 10-, and 12-Pole

Receptacle connector, 1 1/8"-c body, female 9-, 10-, and 12-pole for front mounting, assembled stranded wire, potted with epoxy, chassis side thread 1/2" NPT, screw connection.

- US Color Code -


RKF 901M...1201M

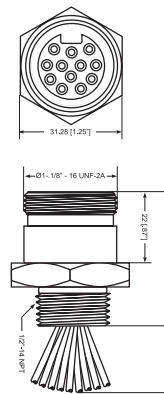

Pin Assignments


Face Views, 1 1/8"-Male / Female

9 pole




- 1 = orange
- 2 = blue
- 3 = red with black tr.
- 4 = green with black tr.
- 5 = white
- 6 = red
- 7 = green
- 8 = white with black tr.
- 9 = black

10 pole



- 1 = orange
- 2 = blue
- 3 = white/black
- 4 = red/black
- 5 = green/black
- 6 = orange/black
- 7 = red
- 8 = green
- 9 = black
- 10 = white

12 pole



- 1 = orange
- 2 = blue
- 3 = white/black
- 4 = red/black
- 5 = green/black
- 6 = orange/black
- 7 = blue/black
- 8 = black/white
- 9 = green
- 10 = red
- 11 = white
- 12 = black



Be Certain with Belden

1 1/8" Mini-Receptacle Connectors, Front Mount, US Color Code

RSF 90M...120M | RKF 901M...1201M

Technical Data

Environmental

Degree of protection IP 68 / NEMA 6P
 Operating temperature range -40°C (-40°F) / +90°C (+194°F)

Mechanical

Insert TPU, yellow
 Contacts CuZn, gold plated
 Receptacle shell Aluminum (anodized, clear)
 Locknut Steel, zinc plated
 O-ring Viton

Electrical

Current rating 9 and 10 pole: 7 A
 12 pole: 5 A
 Voltage rating 600 V

Receptacles

Part Number	Pins	Gauge	Characteristics
RSF 90M-623/1F RKF 901M-623/1F	9	16	
RSF 100M-699/1F RKF 1001M-699/1F	10	16	
RSF 120M-624/1F RKF 1201M-624/1F	12	16	